

U.S. DEPARTMENT OF COMMERCE PATENT AND TRADEMARK OFFICE  
TRANSMITTAL LETTER TO THE UNITED STATES  
DESIGNATED/ELECTED OFFICE (DO/EO/US)  
CONCERNING A FILING UNDER 35 U.S.C. 371

ATTORNEY'S DOCKET NUMBER:  
64591-64607-EN/CMN

U.S. FILING OFFICE (DO/EO/US) FILE NO. **0978897126**

INTERNATIONAL APPLICATION NO.:  
PCT/SE00/00027

INTERNATIONAL FILING DATE:  
10 JANUARY 2000 (10.01.00)

PRIORITY DATE CLAIMED:  
11 JANUARY 1999 (11.01.99)

TITLE OF INVENTION: SYSTEM FOR DATA PROCESSING A SECURITY CRITICAL ACTIVITY

APPLICANT(S) FOR DO/EO/US: Christian WETTERGREN

Applicant herewith submits to the United States Designated/Elected Office (DO/EO/US) the following items and other information

1. ☒ This is a **FIRST** submission of items concerning a filing under 35 U.S.C. 371.
  2. ☐ This is a **SECOND** or **SUBSEQUENT** submission of items concerning a filing under 35 U.S.C. 371.
  3. ☒ This express request to begin national examination procedures (35 U.S.C. 371(f)) at any time rather than delay examination until the expiration of the applicable time limit set in 35 U.S.C. 371(b) and PCT Articles 22 and 39(1).
  4. ☒ A proper Demand for International Preliminary Examination was made by the 19th month from the earliest claimed priority date.
  5. ☒ A copy of the International Application as filed (35 U.S.C. 371(c)(2))
    - a. ☒ is transmitted herewith (required only if not transmitted by the International Bureau).
    - b. ☐ has been transmitted by the International Bureau. (see attached copy of PCT/IB/308)
    - c. ☐ is not required, as the application was filed in the United States Receiving Office (RO/US).
  6. ☐ A translation of the International Application into English (35 U.S.C. 371(c)(2)).
  7. ☐ Amendments to the claims of the International Application under PCT Article 19 (35 U.S.C. 371(c)(3)).
    - a. ☐ are transmitted herewith (required only if not transmitted by the International Bureau).
    - b. ☐ have been transmitted by the International Bureau.
    - c. ☐ have not been made; however, the time limit for making such amendments has NOT expired.
    - d. ☐ have not been made and will not be made.
  8. ☐ A translation of the amendments to the claims under PCT Article 19 (35 U.S.C. 371(c)(3)).
  9. ☒ An oath or declaration of the inventor(s) (35 U.S.C. 371(c)(4)).
  10. ☐ A translation of the annexes of the International Preliminary Examination Report under PCT Article 36 (35 U.S.C. 371(c)(5)).
- Item 11. to 16. below concern document(s) or information included:
11. ☒ An Information Disclosure Statement under 37 CFR 1.97 and 1.98.
  12. ☒ An assignment document for recording. A separate cover sheet in compliance with 37 CFR 3.28 and 3.31 is included.
  13. ☐ A **FIRST** preliminary amendment.
  - ☐ A **SECOND** or **SUBSEQUENT** preliminary amendment.
  14. ☐ A substitute specification.
  15. ☐ A change of power of attorney and/or address letter.
  16. ☒ Other items or information: INTERNATIONAL PRELIMINARY EXAMINATION REPORT (PCT/PEA/409), INTERNATIONAL SEARCH REPORT (PCT/ISA/210), APPLICATION DATA SHEET

## SYSTEM FOR DATA PROCESSING A SECURITY CRITICAL ACTIVITY

## TECHNICAL AREA

- 5 The present invention relates to a system for data processing a security critical activity in a secure management mode in a computer, which computer comprises a processor, handling devices, memory storage means, hereafter named resources.

## BACKGROUND OF THE INVENTION

- 10 Advances in computer and communications technology have increased the flow of information between and within computer networks. This ability to communicate between computers and networks has also made it possible to develop a wide variety of services that can be performed from your own personal computer. Such services may for example be mailing, home shopping, home banking etc. Many of these services comprise security critical activities that have to be performed when the  
15 computer is on-line, such as transferring money through Internet.

- Performing such security critical activities, is of course a security risk, since also potential intruders can listen to and/or compromise these security critical activities, by breaking into the computer. One of the reasons for this is that the operating  
20 systems of personal computers were not designed with security in mind, since they were personal and without connections to any network. Thus, it is easy to use malicious code, Trojan horses or the like to compromise the operating system of a personal computer and thereby the security critical activities executed thereon. Also more secure operating systems, such as Unix, may be compromised with a relatively  
25 small effort. Today there is no commercial operating system that protects the user from Trojan horses.

- To increase the security of the operating system there has been suggested to provide firewalls between the local network and the public available networks open to any  
30 intruders. Such firewalls filter the communication between the local network and the outside world by only allowing certain selected services to pass through. If other services are requested the passing through the firewall will only be enabled if a valid

password is presented. The communication then eventually reaches either a personal computer or a server computer inside the local network. This safety measure will of course increase the security, but will still not guarantee that the security critical activities are performed the way the user initially intended. Vulnerabilities in the implementation of the allowed, non-filtered, services may allow an intruder to  
5 intrude into the personal computer.

Another possible security measurement is to insert security mechanisms in the operating system, like requiring passwords for access to certain services.

10

The main reason why the above security mechanisms are not totally safe is that they are software based. Since software always contains bugs, it is corruptible, and may therefore be compromised by exploited security holes, malicious code, resident Trojan horse software etc. Software based security solutions are also too brittle, i.e. if  
15 the operating system security is compromised all data and all applications that are executed thereon will also be compromised.

One different, but similar approach to increase the operating system security is to build a so called multi level secure (MLS) operating system. Such systems label  
20 objects and subjects according to a security classification, and define rules for how information is allowed to flow through the system. The classification of different security levels and the record keeping of which users that have access to different security levels and objects is very time consuming to maintain. Furthermore, conventional personal computer applications are not compatible with the operating  
25 systems of the MLS system, and all applications have to be tailor-made for the MLS system. This is of course very costly.

A method for performing or executing security critical activities in a computer is disclosed in WO 98/19243 with the same inventor as for the present invention, which  
30 document is hereby incorporated for reference. The system comprises a security device to be connected to the communications means of a personal computer, like a serial port or the PCI bus. The security device comprises a processor, memory and

crypto means. Certain selected IO devices of the computer, such as the screen, keyboard, mouse and smart card reader are provided with switches and crypto means. During normal activity (normal mode) the security device is not active and the computer functions as normal. The presence of the security device and the switching  
5 and crypto means are transparent to the computer.

When a security critical activity is initiated by a signal from the computer processor, the computer is switched to secure management mode. The security device gains control over the selected user IO devices through the switching and crypto means and  
10 shuts out the computer processor from access. The execution of the security critical activity is transferred to the security device and executed there with proper user involvement. Data is protected from the computer processor during transfer between the security device and the user IO devices.

15 The security device must be constructed so that the execution of the security critical activity can be performed securely without any possibility for the computer processor to compromise the execution. The above described system accomplishes this by having a separate processor, separate program memory, separate data memory and several other devices and controllers separate.

20 Unfortunately, this is an expensive solution, since so many functional circuits need to be duplicated. It would be preferable if for example access to a part of the existing PC memory could be divided off for the security device. This would be a major cost benefit, since suitable memory circuits usually only are provided in large sizes. This  
25 would also allow for flexibility, since the security device could divide off as much memory from the large PC-memory as needed for the security activity.

There are several other resources in a PC which could be divided off from the PC's normal control and usage, for protected usage by the security device: devices in  
30 specific slots on the PCI bus or the ISA bus, whole storage devices or sectors on storage devices on a IDE bus, logical devices on an USB bus.

It is important for the security of the security device to minimize the number of hardware mechanisms both the computer processor and the security device can control. since unexpected and dangerous interactions might be performed by the computer processor. On the other hand, we clearly see the cost benefit arising from the ability for protected usage by the security device of existing PC resources. The presence of the security device should also cause minimal changes to the computer processor's normal mode. for compatibility reasons.

#### SUMMARY OF THE INVENTION

- 10 The object of the invention is to provide a system for performing security critical activities in a safe way according to the method described above in a cost effective way utilising many of the memory means and IO devices present in a personal computer.
- 15 According to one aspect of the invention this is achieved with a system according to the preamble, comprising a security device comprising a processor and signal generators, a number of control means, hereafter named switches, with signal receivers arranged respectively between the security device and the pre-selected resources, that the switches contain information regarding accessibility to and from
- 20 the resources, or parts of the resources. hereafter named resource ranges. wherein the switch controls requests from the computer processor to the resources or resource ranges depending on the information contained in the switch, and wherein, in response to a call from the computer processor or the handling devices, the switches are activated by receiving a signal from the security device, enabling the security
- 25 device access to and from the resources or resource ranges selected by the security device, and denying the computer processor access to and from the resources or resource ranges selected by the security device.

According to a further aspect of the invention it is characterised in that the information contained in the switches controls other possible processors contained in or connected to the computer.

According to another aspect of the invention, it is characterised in that the security device comprises a signal generator, wherein, when a switch receives a signal, the security device is able of altering the content of the information of that switch..

- 5 According to another aspect of the invention it is characterised in that the information in the switch enables the switch to control certain areas of the memory means are allocated to be accessed by the processor of the security device only and in that the information in the switch enables the switch to control that certain resources are accessible by the computer processor when not in secure management mode, and
- 10 only accessible by the security device when in secure management mode.

According to yet an aspect of the invention it is characterised in that the switches are hardware switches.

- 15 The advantage with a system according to the invention is that security critical activities may be performed securely and utilising the existing memory and device means already present in the computer. By arranging switches at certain locations, such as connection points to different resources, the fact that the switches contain information regarding accessibility from the processors in different situations, and
- 20 controlling the switches by the security device, the security device has full control over the computer when a security critical activity is to be performed. At the same time, the switches allows the computer processor to gain access to certain resources that the security device is not using. The security device can select the appropriate resources, i.e. activate only those switches associated with the resources that are
- 25 needed for the actual operation. The control of the resources by the switches enables a configuration where certain memory areas are allocated to the security device only, by which it is ensured that no compromised data may never enter the security system.

- The security device is also able of altering the information contained in the switches
- 30 depending on the activities to be performed which allows for a large degree of flexibility.

By using hardware switches, the security system may be built in "from the start", i.e. to a large extent integrated in the hardware of the computer such as the bridges. In all a cost effective and secure system is obtained by the present invention.

- 5 These and other aspects of and advantages with the present invention will be apparent from the detailed description of an embodiment and the patent claims.

#### SHORT DESCRIPTION OF DRAWINGS

- 10 In the following detailed description of an example of an embodiment reference will be made to the accompanied drawings, in which

- Fig. 1 shows a block diagram of the architecture of a pentium pro computer,  
Fig. 2 of the configuration of a switch comprised in the system  
15 according to the invention,  
Fig. 3 shows an example of memory handling of a main memory in a computer according to of the invention,  
Fig. 4 shows an example handling a PCI bus according to the invention, and  
Fig. 5 shows an example of handling an USB bus according to the invention.

20

#### DETAILED DESCRIPTION OF AN EXAMPLE OF EMBODIMENT

- In Fig. 1 the reference sign 10 denotes a processor unit. The processor unit is equipped with an internal cache memory in a conventional manner. In this respect it is to be noted that even though one processor unit is depicted on Fig. 1, there could  
25 be a number of processors working in parallel. The processor unit is signally connected to a host bus 12. To the host bus a Host/PCI Bridge 14 is connected, in some applications referred to as the North Bridge. In some applications it may be divided into two bridges, referred to as the compatibility and the auxiliary PCI bridges. In that respect the bridges act as intermediaries in the communication  
30 between the devices on different buses and the processor. To the Host/PCI bridge a main DRAM 16 (Dynamic Random Access Memory) is connected for temporary read/write instructions to and from the processor unit. The memory is also connected

to and controlled by two Data Paths 17, which in turn are connected to the Host/PCI Bridge and the Host bus.

5 An AGP connection 18 (Accelerated Graphics Port) is arranged between the Host/PCI Bridge and a screen controller and a monitor 20.

10 A PCI Bus 22 is connected to the Host/PCI Bridge and to the PCI Bus an E/ISA Bridge 24 is connected, in some applications referred to as the South Bridge. To the E/ISA Bridge a number of different buses can be connected. In Fig. 1 are shown the ISA Bus 26 to which a number of card slots 28 are connected, which slots may be used for sound cards, network cards and the like; the USB Bus 30 to which e.g. keyboard 32, floppy drives 34, mouse 36 and smart card reader 38 are connected; the IDE Bus 40 to which e.g. hard disk drives 42 are connected, and the X Bus 44. In case of a multi processor system, i.e. with more than one processor, a bus 46 is also  
15 arranged between the E/ISA Bus and the processor unit, the APIC Bus (Advanced Programmable Interrupt Controller). The function of the APIC Bus is to manage interrupt requests from IO devices to the processors.

20 To the PCI Bridge a security device 50 is connected. The security device comprises a processor 54 capable of performing certain commands, which will be described in detail below. A ROM memory 54 is connected to the processor. The security device is further provided with signal generators  $SG_A$  and  $SG_{PM}$ , the function of which will be explained below. At certain locations control means, hereafter named switches 60, are arranged in the hardware of the computer. According to the invention one switch  
25 is arranged at the connecting point of the main memory to the Host/PCI Bridge. Further switches may be arranged at the connection point between the bridges and the buses and/or to a number of different devices of the computer such as the graphics display card, the keyboard, the hard disk drive and such. Conveniently, the switches that are connected to different buses, may be integrated in the bridges. For instance  
30 for a hard disk drive connected to the IDE Bus, the switch is arranged on the E/ISA Bridge at the connection of the Bus.



Figure 2 shows an example of a switch incorporated in a system. A switch 60 is connected to the address and operation lines ADR, OP of a bus. The ADR and OP lines are further connected to a "director" 68. The switch is further provided with a number signal receivers  $SR_A$  (alter),  $SR_S$  (source) and  $SR_{PM}$  (protection mode). The function of the director and the signal receivers will be described below. An enable/abort line 66 is arranged between the switch and the director 68. The director is further connected to different resources or resource ranges 74. In this respect it is to be noted that the word resources means devices such as the hard disk, keyboard and such, and the word resource ranges means for example part of a memory.

The switch contains a table T of addresses to the different resources and a comparator C whose functions will be described below. The table also contains information regarding access to the different resources.

As an example, the resource could be a memory. If the computer is running in normal mode, the computer processor is active and the security device processor is passive, which is detected by the switch via the signal receiver  $SR_S$  receiving a source signal. When the computer processor requests access to the memory, the addresses are checked by the switch and the sources of the request compared with the sources signal by the comparator C. There are then two scenarios regarding the access. Either some of the memory area, a resource range, is only allocated to the security device as specified in the table T, in which the switch then denies the computer processor access to these areas, or the computer processor could have access if in normal mode. Depending on the requests from the computer processor and the accessibility granted by the switch, data and operation signals are directed to and from the requested resource or completely denied.

If a security critical activity is ordered, and the security device requests that the system enters a secure management mode, a signal is sent by the security device from the signal generator,  $SG_{PM}$  to the protection mode signal receiver  $SR_{PM}$  of the switch. Depending on the information in the switch, access by the computer processor to resources controlled by the switch can be withdrawn further when entering into

secure management mode. These resources will then be solely available to the security device processor, according to the information in the switch. The switch controls, in the embodiment shown in Fig. 2, the accessibility to the different sources 74 with the director 68 depending on the requests via the enable/abort line 66. In some cases, the unit requesting an operation, which is denied by the switch, needs to know that access was denied. Therefore, a line 67 is connected between the enable/abort line 66 and the operation lines so as to provide information to be sent back to the unit.

- 10 Depending on the security critical activity to be performed, the content of the table T of the switch may have to be altered. It could be either that the security device does not need a certain resource for the activity and may allow the computer processor to use it, or deny the computer processor access to a resource. In that case, a signal is sent from an Alter Signal Generator, SGA of the security device to the Alter Signal receiver, SRA of the appropriate switches, together with addresses, operations and data. It is to be understood that only the security device is able of changing the content of the switch in this way.

- An example of memory access is shown in Fig. 3. Here a switch 60 is connected to the RAM controller function block 80. If in normal mode, the switch functions, according to the content of the table, so as to allow the security device processor to access the memory area allocated only to the security device while the rest of the memory area is accessible by the computer processor. Some memory area, that in normal mode is accessible by the computer processor, may be allocated to the security device processor only when in protection mode. The switch handles memory requests from different sources SC and allows or denies access according to the mode and source. As opposed to the switch of Fig. 2, no director is needed since there is only one source, the DRAM, and the switch enables or disables access via line 66.

- 30 The same general operation as described above may be obtained with other kinds of resources such as the screen controller. In normal mode the computer processor has

full access to the screen controller, but may be denied access completely when in protection mode. in order to ensure that only "secure" data is shown on the screen.

In the example shown in Fig. 2 the switch is activated by physically separate signals  
5 from the  $SG_{PM}$  and  $SG_A$  to the  $SR_{PM}$  and  $SR_A$  respectively. which is easily obtainable with multi-line buses. However, physically separate signals via lines might need to be propagated between different bus types by controllers like the North and South Bridges, for example. These controllers also might need to translate the signal between different formats for different buses or packet formats. The  
10 controllers/translators are preferably arranged at the connection point between the PCI bus and the North and South bridges respectively. It is also to be understood that they could be arranged in the switches.

Figure 4 shows an example of a switch controlling the PCI bus 22. In this case the  
15 switch is a part of the PCI controller function block 82. The switch is not placed between the requesting source and the resource. Instead it "surveys" the PCI bus. If, according to the content of the switch, a request for access to a resource is made by a source, which is not allowed, the switch generates an "illegal" signal via the line 84 to the bus, thereby denying access for that source. In the same way as above, signals  
20 are sent by the security device to the switch for entering a protection mode or altering the contents of the table of the switch.

Some devices that the security device wishes to control in protection mode may be connected to serial buses, such as keyboard, mouse, card reader and such. In those  
25 cases, depending on how the information is transmitted on the bus, the signals from the security device may be sent together with the rest of the information. If the information is sent in packages containing address, operation and data, one part of the package contains the signals to the switch. If on the other hand the information is divided into smaller packages "sub packages", i e one package containing addresses,  
30 one package containing data, and so forth, one sub package contains the signals to the switch.

Figure 5 shows an example of a switch 60 controlling a USB bus. Here the switch is arranged between the USB requests and the USB controller function block 90.

Depending on the requests from the different sources, and the content of the switch and the mode, the switch may allow access or send an abort request back to the source.

A further alternative is that a switch is arranged at the connection between for example the E/ISA Bridge and the serial bus and functioning in the way described above. In this way only one switch is necessary for controlling and enabling/disabling access to a number of devices on the bus, depending on the information contained in the switch.

The switches may also comprise crypto means for encrypting and decrypting data from and to the different devices and the processor of the security device. we will not discuss the case with the communication between the security device and a device is protected with crypto means further. Reference is made to WO 98/19243 for more information regarding this.

During normal operation the main processor has access to and communicates with most devices and memories of the computer via the different buses and bridges. i e normal mode. During normal operation, the switches control and denies access to the resources that are only allocated to the security device, as specified in the switches.

When a security critical activity is ordered, which could be initiated by the processor or an IO device, the security device is activated. Depending on the type of security critical activity, certain information and programs are transferred from the ROM of the security device to its processor to perform certain tasks before the security critical activity commences, i e putting the computer in a secure management mode. Signals from SGPM are then generated to those switches that are affected by the actual security critical activity.

One example is if the security critical activity requires temporary memory space, a PM- signal is sent by the security device processor to the switch arranged at the connection of the main memory. In order to ensure that information written and read in the main memory during the security critical activity is not compromised, a certain  
5 area of the main memory may be allocated to the processor of the security device only.

A further example is if the security device requires a large program or large volumes of information to perform a security critical activity. In that case a switch in the  
10 connection of for example the IDE bus may be activated. As with the main memory, certain areas of the hard disk drive may be allocated to the security device only. This measure ensures that the security device only can access and deliver data from and to that area of the hard disk drive, ensuring that the information cannot be  
compromised.

According to the invention switches may be built in at suitable locations and for  
15 different devices, internal as well as IO devices. The switch function may be of different types depending on the type of device and function, such as access only by the security device, as described above, access only by the computer processor or  
20 access by the security device if the computer is in the secure management mode.

It is to be noted that even though the computer processor has been mentioned above as the main source of requests to different sources, apart from the security device, there may be other processors in a modern computer since the design of the computer  
25 tends to be more and more distributed. There may for instance be PCI cards containing processors that are able of reading/writing to any part of the memory. Also, the processor unit of the computer may comprise more than one processor, in which case it is important that a switch is located at the connection between the APIC bus and the Host/PCI bridge, since the APIC bus handles many interrupt requests.

30

It is therefor important that the security device is able of controlling more sources than the computer processor in order to prevent an attacker from circumvent the

security system by changing the content of the operating system of the PCI card. A function of the security device may be a plug and play function, i.e. the security device locates and identifies all sources connected to the computer in order to be able to control them. In this way, a distributed MMU-like function is obtained, providing a greater robustness against security loop holes. However, writing information to the switches shall still only be able to be performed by the security device processor, and allocation requests of resources have to be sent to the security device processor for approval.

10 In this respect it is to be noted that the information contained in the different switches, such as addresses and accessibility by which processor and in which situation is arranged depending on the actual resource -es that the actual switch controls. It is also to be noted that the security device activates different switches to different resources depending on the actual security critical activity to be performed.

15 It is obvious that interrupt signals generated by allocated resources are redirected by the switch to the security device processor. Support functions such as DMA functions and timers are handled in a similar way, and their operation have in some cases to be controlled by a switch function so as to prevent them from being used by the computer processor illegally. These problems are well known to a man skilled in the art.

20 It shall also be noted that the computer configuration described and shown is only an example. There may be a wide variety of other configurations and arrangements with the same function. In that sense it should be understood that the bridges may be one and the same, that the computer may or may not have all the different buses described, that the screen controller may be connected to the AGP, the ISA or the PCI bus, that the keyboard, floppy and mouse may be connected to other buses such as the USB.

30

## PATENT CLAIMS

1. System for data processing a security critical activity in a secure management mode in a computer, which computer comprises a processor (10), handling devices (20, 28-38), memory storage means (14, 42), hereafter named resources;
- 5 that the system comprises a security device (50) comprising a processor (52) and signal generators ( $SG_{PM}$ ,  $SG_A$ ), a number of control means, hereafter named switches (60), with signal receivers ( $SR_A$ ,  $SR_{PM}$ ) arranged respectively between the security device and the pre-selected resources,
- that the switches contain information regarding accessibility to and from the
- 10 resources, or parts of the resources, hereafter named resource ranges, wherein the switch controls requests from the computer processor to the resources or resource ranges depending on the information contained in the switch, and wherein, in response to a call from the computer processor or the handling devices, the switches are activated by receiving a signal ( $SG_{PM}$ ) from the security
- 15 device, enabling the security device access to and from the resources or resource ranges selected by the security device, and denying the computer processor access to and from the resources or resource ranges selected by the security device.
2. system according to claim 1, c h a r a c t e r i s e d in that the signal ( $SG_{PM}$ ) can be
- 20 generated only by the security device.
3. System according to claim 1, c h a r a c t e r i s e d in that the information contained in the switches controls access to resources for requests from other possible processors contained in or connected to the computer.
- 25 4. System according to claim 1, c h a r a c t e r i s e d in that the security device comprises a signal generator ( $SG_A$ ), wherein, when a switch receives a signal ( $SG_A$ ), together with new information (addresses, operation, data), the security device is able of altering the content of the information of that switch.
- 30 5. System according to claim 1, c h a r a c t e r i s e d in that the switches comprise a signal receiver ( $SR_S$ ) by which it can detect which source is handling the computer,

and that the switch compares this with the resource which requests access to a resource or resource range controlled by the switch, and depending on the information in the switch, enables or denies access to that resource.

- 5 6. System according to claim 1, characterised in that the information in the switch enables the switch to control certain areas of the memory means are allocated to be accessed by the processor of the security device only.

- 10 7. System according to claim 1, characterised in that the information in the switch enables the switch to control that certain resources are accessible by the computer processor when not in secure management mode, and only accessible by the security device when in secure management mode.

- 15 8. System according to claim 1, characterised in that the switches are hardware switches.



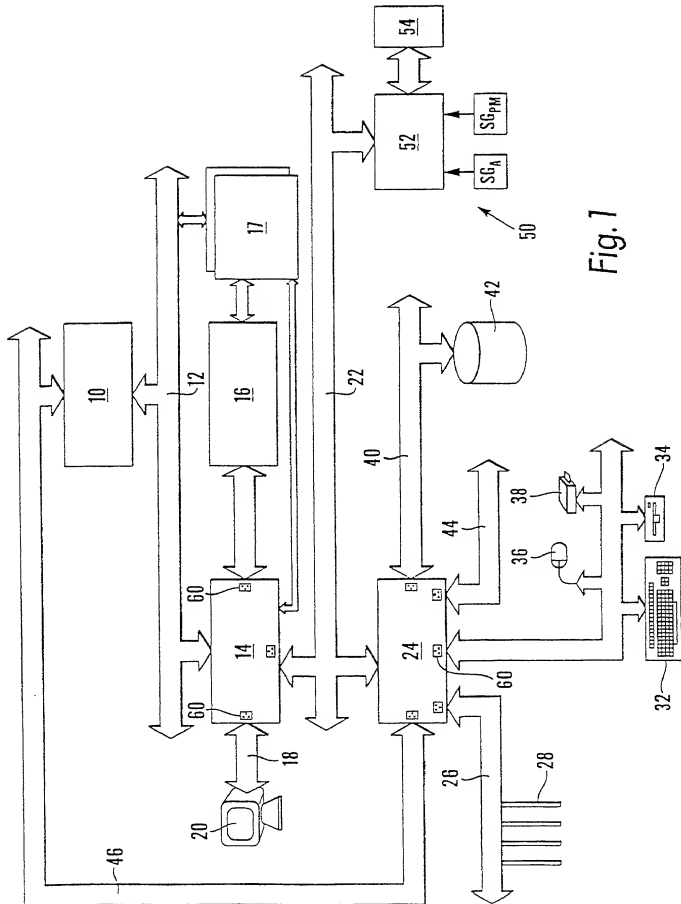


Fig. 1

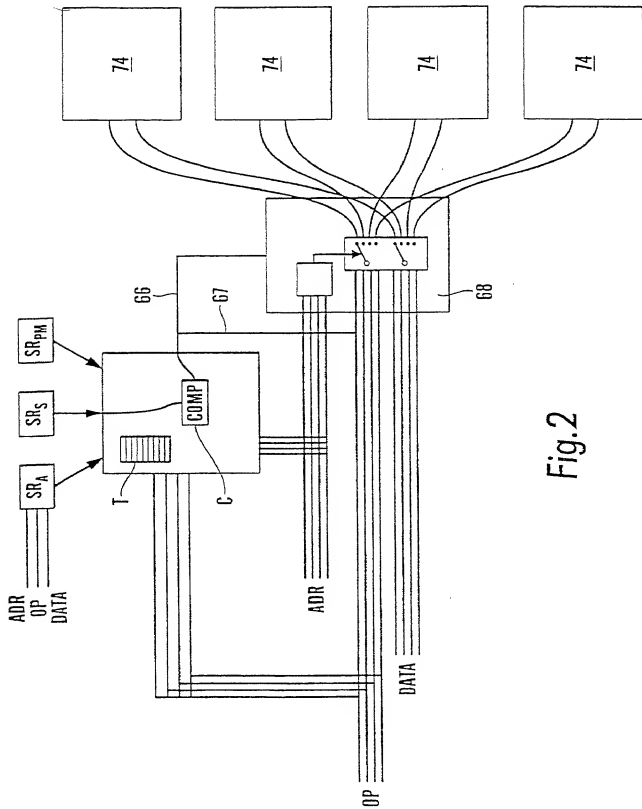


Fig. 2



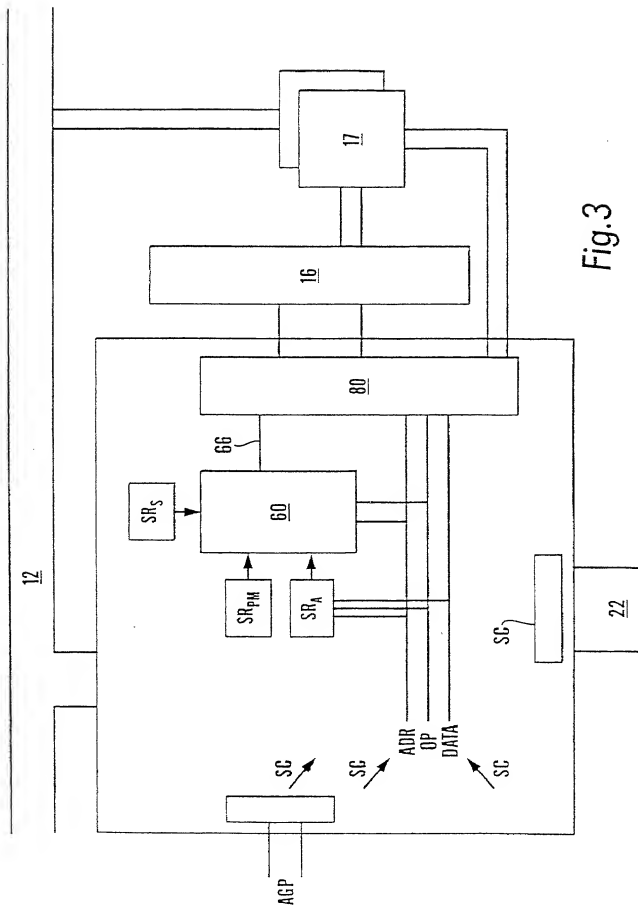


Fig.3

Fig. 4

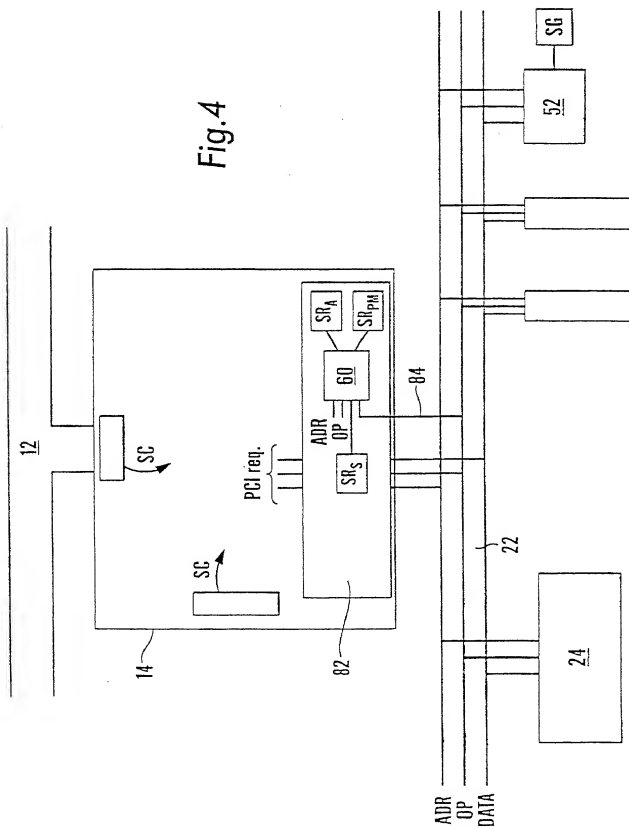

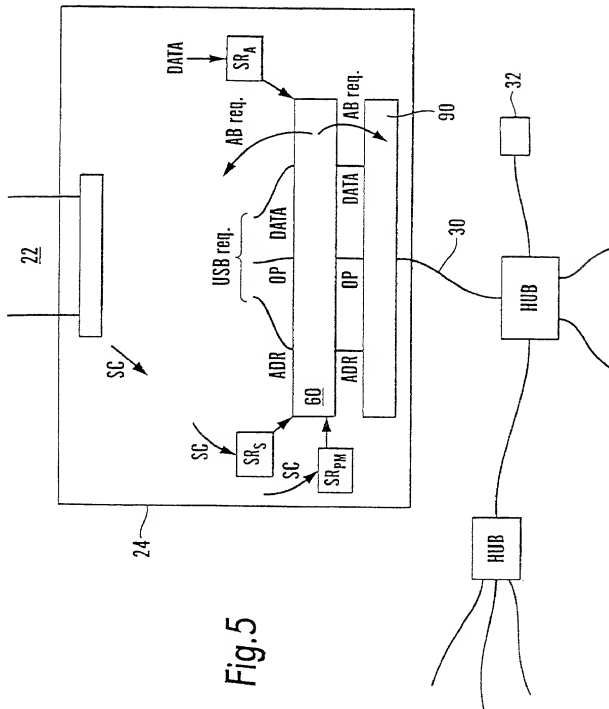

Ref. 64591-64607

**COMBINED DECLARATION AND POWER OF ATTORNEY**

As a below named inventor, I hereby declare that

My residence, post office address and citizenship are as stated below next to my name.

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled:

**SYSTEM FOR DATA PROCESSING A SECURITY CRITICAL ACTIVITY**

the specification of which: *(check one)*

**REGULAR OR DESIGN APPLICATION**

☐ is attached hereto.

☐ was filed on \_\_\_\_\_ as application Serial No. \_\_\_\_\_ and was amended on \_\_\_\_\_ (if applicable).

**PCT FILED APPLICATION ENTERING NATIONAL STAGE**

☒ was described and claimed in International application No. PCT/SE00/00027 filed on 10 January 2000 and as amended on \_\_\_\_\_ (if any).

I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, § 1.56.

**PRIORITY CLAIM**

I hereby claim foreign priority benefits under 35 USC § 119(a)-(d) of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application for patent or inventor's certificate having a filing date before that of the application on which priority is claimed.

Country	Application Number	Date of Filing (day, month, year)	Priority Claimed
Sweden	9900051-5	11 January 1999	yes

I hereby claim the benefit under 35 U.S.C. § 119(e) of any United States provisional application listed below.

60/115,48811 January 1999

(Application Serial No.)

(Filing Date)

*(Complete this part only if this is a continuing application.)*

I hereby claim the benefit under 35 USC § 120 of any United States application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of 35 USC § 112, I acknowledge the duty to disclose information which is material to patentability as defined in Title 37 Code of Federal Regulations § 1.56 which became available between the filing date of the prior application and the national or PCT international filing date of this application:

(Application Serial No.)

(Filing Date)

(Status—patented, pending, abandoned)

## POWER OF ATTORNEY

The undersigned hereby authorizes the U.S. attorney or agent named herein to accept and follow instructions from **Albhins Stockholm AB** as to any action to be taken in the Patent and Trademark Office regarding this application without direct communication between the U.S. attorney or agent and the undersigned. In the event of a change in the persons from whom instructions may be taken, the U.S. attorney or agent named herein will be so notified by the undersigned.

As a named inventor, I hereby appoint the registered patent attorneys represented by Customer No. **000466** to prosecute this application and transact all business in the Patent and Trademark Office connected therewith, including: **Robert J. PATCH, Reg. No. 17,355, Andrew J. PATCH, Reg. No. 32,925, Robert F. HARGEST, Reg. No. 25,590, Benoit CASTEL, Reg. No. 35,041, Eric JENSEN, Reg. No. 37,855, Thomas W. PERKINS, Reg. No. 33,027, and Roland E. LONG, Jr., Reg. No. 41,949,**

c/o YOUNG & THOMPSON,  
Second Floor,  
745 South 23rd Street,  
Arlington, Virginia 22202.



Address all telephone calls to Young & Thompson at 703/521-2297. Telefax: 703/685-0573.

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Full name of sole or first inventor: **Christian WETTERGREN**  
(given name, family name)

Inventor's signature

*Christian Wettergren*  
*by Power of Attorney*  
*SEX*

Date

*2 July, 2001*

Residence: **Stockholm, Sweden**

Citizenship: **Swedish**

Post Office Address: **Sodermannagatan 58  
S-116 65 Stockholm, Sweden**